
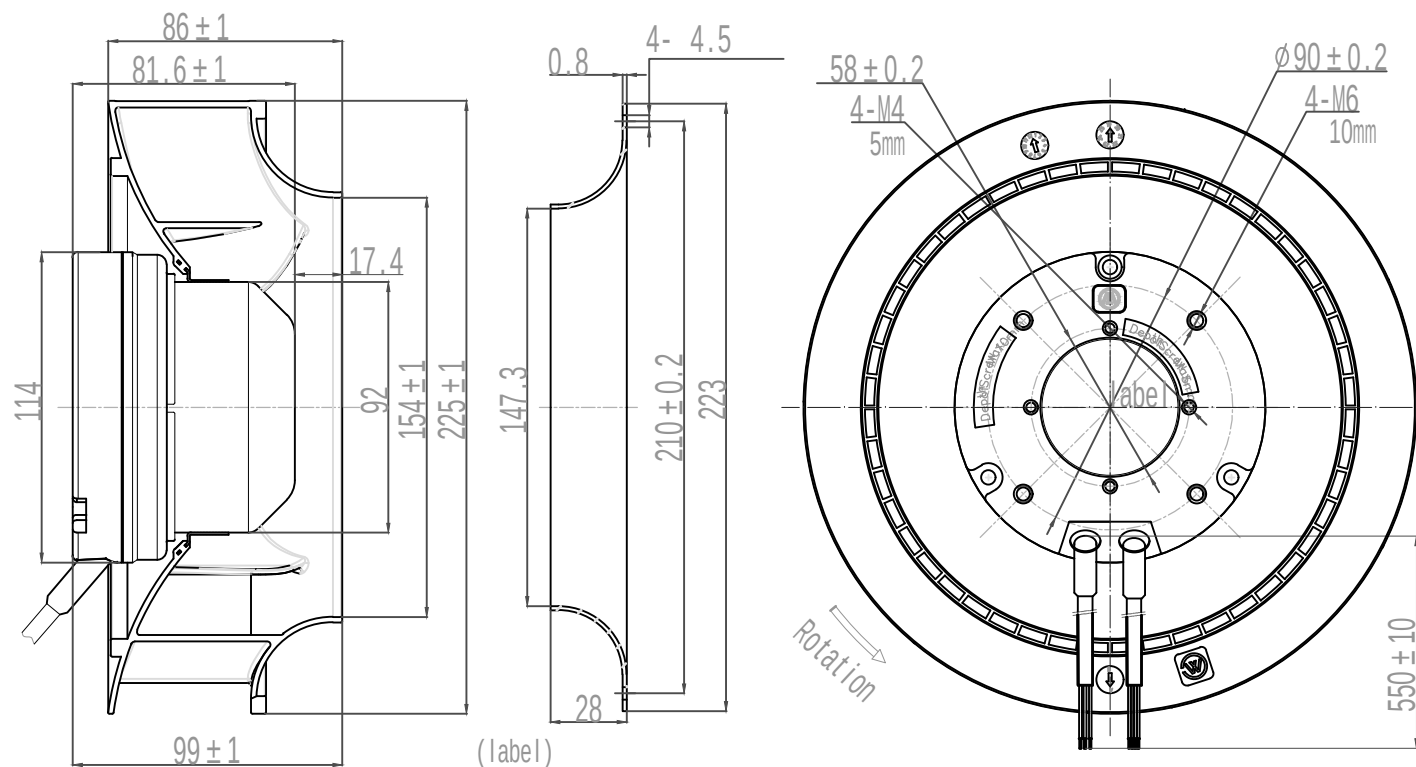
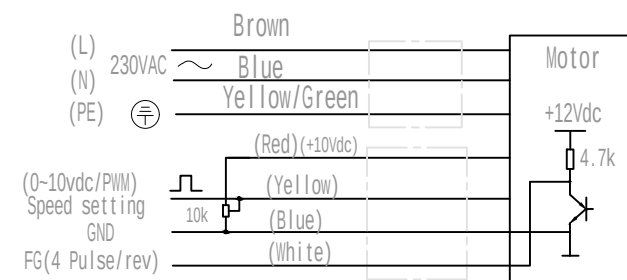




1	(Rated Voltage)		230 VAC
2	(Voltage Range)		230 ± 10% (VAC)
3	(speed)	(In free blowing condition)	3020 ± 5% (r/min)
4	(power)		155 ± 15% (W)
5	(Air volume)		1314 ± 10% (m³/H)
6	Tach Pulse Output		4 pulse/rev
7	Rotation		CW(see from rotor)
8	Insulation class		B (Class B
9	Duty cycle		(Continuous)
10	Ambient temp		-25 +60
11	Protected Class		IP44
12	Dynamic balance		G6.3
13	Electronic Protected		(Yes)
14	EMC	(Emission)	EN55014-1
		(Immunity)	EN55014-2

NO.	Colour ()	Definition	Guage ()
1			UL2464 20AWG
2			
3	/		

NO.	Colour ()	Function	Gauge ()
1		+10	UL2464 22AWG
2			
3			
4			

[illegible]